1 PERFORMANCE DASHBOARD2 LCA & MATERIAL HEALTH RESULTS & INTERPRETATION

HOW WE MAKE IT GREENER

SM Transparency Catalog ▶ Knauf Insulation Showroom ▶ Atmosphere™ Duct Wrap & KN Series

Download PDF

Start a project



Atmosphere™ Duct Wrap & KN Series

Knauf Insulation Atmosphere Duct Wrap and KN Series insulation are thermal and acoustical insulation blankets made from highly resilient, inorganic glass mineral wool bonded by ECOSE® technology.

The Atmosphere Duct Wrap is designed for external insulation on commercial or residential heating and air conditioning units, and is available unfaced, with a foil-scrim-kraft (FSK) jacket and with a white metalized polypropylene-scrim-kraft (PSK) jacket. The KN Series is used as utility thermal and/or acoustical insulation and is available unfaced. KN Series has been used as the insulation material in double walled ducts.





Performance dashboard

Features & functionality

Low "k" factor significantly reduces heat gain or loss when applied with proper compression

Flexible and lightweight

Excellent acoustical properties

Lowers operating and installation costs

Low emitting for indoor air quality considerations and formaldehyde-free

Visit Knauf for more product information: Atmosphere Duct Wrap, KN Series

Environment & materials

Improved by:

Utilization of recycled glass

Knauf's original plant-based ECOSE binder technology

Optimized compression packaging

Certification & rating systems:

Declare, Red List Free and HPD v2.1

UL GREENGUARD Gold certified

UL Validated recycled content

UL Validated formaldehyde-free

Audited, European Certification Board for Mineral Wool Products exoneration process

ASTM C 1139 - unfaced; Type I, Type II; Grade 1 - 0.75 lb/ft3; Grade 2 - 1.0 lb/ft3; Grade 3 - 1.5 lb/ft3 (Duct Wrap), ASTM C 553; Type I, II, III (Duct wrap), ASTM C553: Type I, Type II (KN Utility Insulation)

CSI MasterFormat® #MF 07 21 16, 23 07 13
Thermal Insulation Guide Specification
Atmosphere Duct Wrap, KN Series
For spec help, contact us or call 317 421 8727

See LCA, interpretation & rating systems

See materials, interpretation & rating systems

Declare.











SM Transparency Report™ + Material Health Overview™

VERIFICATION

LCA

3rd party reviewed

▼ NSF

Transparency Report

3rd party verified

⊘ NSF

Material evaluation

Self-declared

O

Validity: 12/03/18 – 12/03/23 KNA – 12032018 – 006 This environmental product declaration (EPD) was independently verified by NSF to ISO 21930:2017, EN 15804, the ULE PCR and ISO 14025:2006.

NSF Certification, LLC

P.O Box 130140 789 N.Dixboro Road Ann Arbor, MI 48105, USA www.nsf.org 734 769 8010



SUMMARY Reference PCR

UL Building Envelope Thermal Insulation, 04/18 – 02/23

Regions; system boundaries

North America; Cradle to grave

Functional unit / reference service life: 1 m² of installed insulation w/packaging; thickness that gives an avg thermal resistance of RSI = 1 m²·K/W over 75 years.

LCIA methodology: TRACI 2.1

LCA software; LCI database

GaBi 7; GaBi 2017

LCA conducted by: Sustainable Minds

Public LCA:

Knauf and Manson Products

Knauf Insulation, Inc.

One Knauf Drive Shelbyville, IN 46176

317 398 4434



LCA & material health results & interpretation

Atmosphere™ Duct Wrap & KN Series

Life cycle assessment

Scope and summary

○ Cradle to gate ○ Cradle to gate with options **② Cradle to grave**

Application

External insulation on commercial or residential heating or air conditioning ducts in North America. It is suitable for the exterior of rectangular or round sheet metal ducts and spaces or surfaces where temperature and condensation must be controlled. KN Utility Insulation is used as thermal and/or acoustical insulation in the appliance, equipment, industrial, commercial, and marine markets. KN Insulation has been successfully used as a Red List free and formaldehyde-free core in double wall duct systems. Insulation is delivered to the installation site as one packaged bag containing varying amounts of product.

Functional unit

Reference service life: 75 years. One square meter of installed insulation material, packaging included, with a thickness that gives an average thermal resistance of $R_{s_1}=1$ m²·K/W over a period of 75 years.

Reference flow: 0.619 kg of product with an unfaced option or a 0.144 kg FSK facing option, at a thickness of 0.0515 m to achieve the functional unit. (ASTM C518)


Manufacturing data

Reporting period: October 2015 – September 2016 Location: Shelbyville, IN; Lanett, AL; and Shasta Lake, CA

Default installation, packaging, and disposal scenarios

At the installation site, insulation products are unpackaged and installed. Tape may be used to install duct wrap. No material is lost or wasted because scraps are typically used to fill corners or crevices. Plastic packaging waste is disposed (15% to recycling, 68% to landfill, and 17% to incineration), and no maintenance or replacement is required to achieve the product's life span. After removal, the insulation is assumed to be landfilled.

Material composition greater than 1% by weight Post-consumer cullet Batch 48.0% Batch Internal cullet 8.8% Batch Sand 8.2% **Packaging** Plastic film 8.0% Batch Borax 6.5% Facing Facing (average) 5.2% **Facing** Facing adhesive 3.6% Batch Soda ash 3.3% Batch Sugars 2.3% Batch Limestone 1.9% Batch Dolomite 1.4% Batch Ammonium sulfate 1.1% Other 1.8%

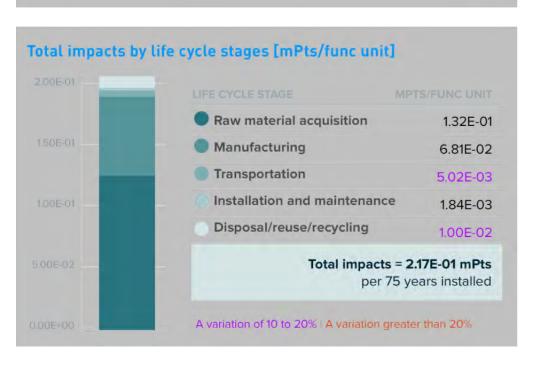

What's causing the greatest impacts

All life cycle stages

For unfaced products, the manufacturing stage dominates the results for all impact categories except for eutrophication and respiratory effects, where the raw materials acquisition stage dominates. Following these two stages, the next highest impacts come from transportation and disposal, which have a similar contribution. However, for noncarcinogenics, the disposal stage is the second highest contributor due to the landfilling of the product at end of life, and for smog, the transportation is the second highest contributor due to the use of trucks and rail transport. The impact of the raw material acquisition stage is mostly due to the borax and soda ash in the batch. Since sand and borax are melted in the oven, they are not released into the air as fine particulates and therefore likely actually contribute less than what is calculated in the results tables below. The manufacturing stage shows major contributions to all impact categories. The landfilling of the discarded product contributes to the disposal stage. The only impacts associated with installation and maintenance are due to the disposal of packaging waste, which is the smallest contributor of all the stages.

For faced products, the raw material acquisition stage is higher compared to the unfaced products because it includes potential impacts from the facing. Potential impacts for transportation and disposal are also higher due to the added mass from the addition of facing.

Manufacturing stage

The energy required to melt the glass and produce the glass fibers is the largest contributor to the manufacturing stage for all impact categories.

Characterized vs. single score results

Due to normalization and weighting, different stages can dominate the characterized and single score results. The batch ingredients sand and borax contribute significantly to the respiratory effects category, causing the raw materials acquisition stage to dominate the mPt results, but not the characterized results. However, they are not released into the air as fine particulates and therefore likely actually contribute less than what is calculated in the raw material acquisition stage. What this means is that the manufacturing stage may have a larger share of the impact than what is displayed in the total impacts by life cycle stage.

Sensitivity analysis

KN Utility Insulation is an unfaced product, while Atmosphere Duct Wrap has the option of coming unfaced or with FSK facing. When FSK facing is added, there is an increased amount and different types of raw materials which impacts the raw material acquisition stage. The increased mass of the product with FSK facing causes a slightly higher transportation impact. There is also an increased impact during disposal due to the FSK facing materials being landfilled.

Multi-product weighted average

Results represent the weighted average using production volumes for the products covered. Variations of specific products for differences of 10–20% against the average are indicated in purple; differences greater than 20% are indicated in red. A difference greater than 10% is considered significant.

How we're making it greener

Knauf and Manson are committed to providing products that conserve energy and preserve natural resources.

- These products use ECOSE® Technology, which is a plant-based binder adhesive instead of a fossil fuel based binder. ECOSE Technology represents a fossil fuel avoidance equivalent of 100,000 barrels of oil a year for Manson and Knauf Insulation products
- Our products contain a high degree of recycled content, which translates to 20% less glass melting energy and a 25% reduction in embodied carbon.
- Our utilization of recycled content reduces mining impacts by 60%. In fact, Knauf and Manson products combined use 10 railcars of recycled glass a day.
- All glass fiber made by Manson and Knauf is audited by a 3rd party to ensure biosoluble chemistry from a health and safety standpoint.

See how we make it greener

LCA results

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION	MANUFACTURING	TRANSPORATION	INSTALLATION AND MAINTENANCE	DISPOSAL/REUSE/ RECYCLING
Information modules: Included Excluded*	A1 Raw Materials	A3 Manufacturing	A4 Transporation/ Delivery	A5 Construction/ Installation	C1 Deconstruction/ Demolition
*In the installation and maintenance phase, packaging waste in module A5 is the only	A2 Transportation			B1 Use	C2 Transporation
contributor to the potential impacts.				B2 Maintenance	C3 Waste Processing
				B3 Repair	C4 Disposal
				B4 Replacement	
				B5 Refurbishment	
				B6 Operational energy use	
				B7 Operational water use	

SM 2013 Learn about SM Single Score results

Impacts per 75 years of service	1.32E-01 mPts	6.81E-02 mPts	5.02E-03 mPts	1.84E-03 mPts	1.00E-02 mPts
Materials or processes contributing >20% to total impacts in each life cycle stage	Batch material and binder material production.	Energy required to melt the glass and produce the glass fibers.	Truck and rail transportation used to transport product to building site.	Transportation to disposal and disposing of packaging materials.	Transportation to landfill and landfill of product.

Unfaced Duct Wrap and KN Utility Insulation: TRACI v2.1 results per functional unit

RAW MATERIAL ACQUISITION

1.09E-10

A variation of 10 to 20% | A variation greater than 20%

kg CFC-11 eq

Ecological dam	age						
Impact category	Unit						
Acidification	kg SO ₂ eq	?	1.81E-03	5.38E-03	1.24E-03	3.32E-05	2.88E-04
Eutrophication	kg N eq	?	3.31E-04	2.81E-04	9.87E-05	8.35E-06	1.70E-05
Global warming	kg CO ₂ eq	?	2.91E-01	7.58E+00	2.31E-01	5.02E-02	6.28E-02

7.36E-10

INSTALLATION AND MAINTENANCE

5.65E-11

TRANSPORTATION

1.59E-12

DISPOSAL/REUSE/ RECYCLING

8.33E-13

Human health damage

Ozone depletion

Impact category	Unit						
Carcinogenics	CTU _h	?	1.16E-10	4.46E-10	1.22E-10	1.89E-11	2.09E-10
Non-carcinogenics	CTU _h	?	9.12E-09	2.69E-08	9.08E-09	2.57E-09	2.35E-08
Respiratory effects	kg PM _{2.5} eq	?	2.19E-03	7.43E-04	6.44E-05	2.91E-05	1.58E-04
Smog	kg O ₃ eq	?	2.88E-02	7.12E-02	4.14E-02	7.46E-04	6.65E-03

Additional environmental information

Impact category	Unit						
Ecotoxicity	CTU _e	?	5.57E-02	8.23E-02	2.88E-02	9.06E-04	6.14E-03
Fossil fuel depletion	MJ, LHV	?	4.79E-01	3.37E+00	4.38E-01	1.44E-02	1.24E-01

FSK-faced Duct Wrap: TRACI v2.1 results per functional unit

A variation of 10 to 20% | A variation greater than 20%

LIFE CYCLE STAGE	RAW MATERIAL ACQUISITION	MANUFACTURING	TRANSPORTATION	INSTALLATION AND MAINTENANCE	DISPOSAL/REUSE/ RECYCLING
------------------	-----------------------------	---------------	----------------	------------------------------	------------------------------

Ecological damage

Impact category	Unit						
Acidification	kg SO ₂ eq	?	3.26E-03	5.38E-03	1.49E-03	3.32E-05	3.47E-04
Eutrophication	kg N eq	?	4.54E-04	2.81E-04	1.19E-04	8.35E-06	2.05E-05
Global warming	kg CO ₂ eq	?	6.71E-01	7.58E+00	2.79E-01	5.02E-02	7.58E-02
Ozone depletion	kg CFC-11 eq	?	3.24E-09	7.36E-10	1.92E-12	5.65E-11	1.01E-12

Human health damage

Additional environmental information

See the additional EPD content required by the UL Environment PCR on page 4 of the Transparency Report PDF.

References

LCA Background Report

Knauf Insulation and Manson Insulation Products LCA Background Report (public version), Knauf 2018. GaBi 7, GaBi 2017 database.

PCRs

ISO 21930:2017 serves as the core PCR along with EN 15804 and UL Part A.

ULE PCR Part A: Life Cycle Assessment Calculation Rules and Report Requirements v3.1

May 2, 2018. Technical Advisory Panel members reviewed and provided feedback on content written by UL Environment and USGBC. Past and present members of the Technical Advisory Panel are listed in the PCR.

ULE PCR Part B: Building Envelope Thermal Insulation

Version 2.0, April 2018. PCR review conducted by Thomas Gloria, PhD (chair, t.gloria@industrial-ecology.com); Andre Desjarlais; and Christoph Koffler, PhD.

ULE General Program Instructions v2.1, April 2017

ISO 14025, "Sustainability in buildings and civil engineering works -- Core rules for environmental product declarations of construction products and services", ISO21930:2017

Download PDF SM Transparency Report/Material Health Overview, which includes the additional EPD content required by the UL Environment PCR.

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. TRs/EPDs of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore, cannot be used as comparative assertions unless the conditions defined in ISO 14025 Section 6.7.2. 'Requirements for Comparability' are satisfied. Comparison of the environmental performance of building envelope hermal insulation using EPD information shall be based on the product's use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under the PCR. Full conformance with the PCR for building envelope thermal insulation allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI data sets may lead to different results upstream or downstream of the life cycle stages declared.

Rating systems

The intent is to reward project teams for selecting products from manufacturers who have verified improved life-cycle environmental performance.

LEED BD+C: New Construction | v4 - LEED v4

Building product disclosure and optimization

Environmental product declarations

Industry-wide (generic) EPD ½ product

✓ Product-specific Type III EPD

1 product

Green Globes for New Construction and Sustainable Interiors Materials and resources

NC 3.5.1.2 Path B: Prescriptive Path for Building Core and Shell

C 3.5.2.2 and SI 4.1.2 Path B: Prescriptive Path for Interior Fit-outs

Collaborative for High Performance Schools National Criteria **MW 7.1 – Environmental Product Declarations**

Third-party certified type III EPD

2 points

SM Transparency Report™ + Material Health Overview™

VERIFICATION LCA NSF. 3rd party reviewed Transparency Report **✓** NSF. 3rd party verified

Material evaluation

Self-declared

Validity: 12/03/18 - 12/03/23 KNA - 12032018 - 006

This environmental product declaration (EPD) was independently verified by NSF to ISO 21930:2017, EN 15804, the ULE PCR and ISO 14025:2006.

NSF Certification, LLC

P.O Box 130140 789 N.Dixboro Road Ann Arbor, MI 48105, USA 734 769 8010



SUMMARY Reference PCR

04/18 - 02/23

Regions; system boundaries North America; Cradle to grave

Functional unit / reference service life: 1 m² of installed insulation w/packaging; thickness that gives an avg thermal resistance of RSI = $1 \text{ m}^2 \cdot \text{K/W}$ over 75 years.

LCIA methodology: TRACI 2.1

LCA software; LCI database GaBi 7; GaBi 2017

LCA conducted by: Sustainable Minds

Public LCA: Knauf and Manson Products

Knauf Insulation, Inc. One Knauf Drive Shelbyville, IN 46176 317 398 4434

Atmosphere[™] **Duct Wrap & KN Series**

1 PERFORMANCE DASHBOARD

2 LCA & MATERIAL HEALTH RESULTS & INTERPRETATION

Start a project

Download PDF

Material health

LCA & material health results & interpretation

Evaluation programs

Declare

Declare labels are issued to products disclosing ingredient inventory, sourcing and end of life options. Declare labels are based on the Manufacturers Guide to Declare, administered by the International Living Future Institute.

How it works

Material ingredients are inventoried and screened against the Living Building Challenge (LBC) Red List which represents the 'worst in class' materials, chemicals, and elements known to pose serious risks to human health and the greater ecosystem.

The Health Product Declaration® The HPD Open Standard provides a consistent, and transparent format to accurately disclose the material contents and associated hazard classifications for a building product.

How it works

Material ingredients are screened and categorized according to the hazards that international governmental bodies and toxicology experts have associated with them, based on two listings:

- Authoritative lists maintained or recognized by government bodies
- Screening lists, which include chemicals that government bodies determined need further scrutiny, as well as chemical lists not recognized by any government body.


Assessment scope and results

Declare™

Inventory threshold: 100 ppm

Declare level: The Declare product database and label

are used to select products that meet the LBC's stringent materials requirements, streamlining the materials specification and certification process.



KN Insulation



Click the label to see the full declaration.

Unfaced Duct Wrap



Health Product Declaration®



Amtmosphere Duct Wrap with FSK Facer Inventory threshold: 100 ppm Full disclosure known hazards: Yes Based on the selected content inventory threshold: Characterized Screened Identified **TOTAL INTENTIONAL INGREDIENTS GreenScreen® List Translator Scores** 3.46% 0.13% , 3.32% 0.33% List Translator Likely Benchmark 1/ 5.13° Benchmark 1 ? List Translator Possible Benchmark 1 ? List Translator Benchmark Unknown 🕜 Benchmark 3 ? Benchmark 3 ? Benchmark 4 ? 🌑 No GS data available 🕜 Learn about the GreenScreen® List Translator **Total VOC Content**

VOC Content data is not applicable for this product category.

References

Declare Unfaced Duct Wrap KN Insulation

Manufacturer's Guide to Declare

A comprehensive guide providing information about the program, the

assessment methodology, how to submit material data to obtain a Declare label and how they are used to meet the Health & Happiness and Materials Petals of the Living Building Challenge. **Health Product Declaration®**

Amtmosphere Duct Wrap with FSK Facer

Health Product Declaration Open Standard v2.1 The standard provides

guidance to accurately disclose the material contents of a building product using a standard, consistent, and transparent format.

What's in this product and why

Declare level

The base fibers of both Atmosphere™ Duct Wrap and KN Utility **Insulation have no Red List chemicals.** The Red List is a list of chemicals that are not allowed in Living Building Challenge buildings. Being Red List free is our design benchmark at Knauf.

Because of stringent fire performance requirements for this class of product, fire retardants are used in the foil scrim kraft (FSK) product variant. Those fire retardants are on the Red List. A health product declaration (HPD) is provided for the FSK variant.

What's in the product and why The ingredients of the unfaced variants avoid the 800+ chemicals of the

Living Building Challenge Red List. This is primarily because of its biobased binder adhesive chemistry known as ECOSE® Technology. ECOSE is based on dextrose or high fructose corn syrup instead of phenol and formaldehyde. Dextrose and fructose can be used interchangeably. The ECOSE binder allows the product to be validated by the UL Environment as formaldehyde-free. Formaldehyde is a Red List chemical.

Atmosphere Duct Wrap with the FSK facer does not meet Red List free status because the facer contains a halogenated fire retardant (HFR). This is why we disclose the ingredients as an HPD rather than Declare used for all other product variants.

Red List free is our development benchmark and we constantly challenge

ourselves on elimination of Red List chemicals. An HFR is used on the FSK variant because the product is for exposed applications and must meet stringent fire performance requirements. We are very aware of the concerns associated with HFRs and continually work with vendors on this issue. At the same time, fire performance is critical and current events relating to fire performance of building materials only support the importance of fire-safe products. What's been done in the design and manufacture in consideration

of the potential human health impacts in the use stage Knauf led the industry in bio-based development to avoid phenol and formaldehyde in our processes beginning in 2008. This development was likely the largest green chemistry disruption of our era. Today, our competitors have followed or are striving to meet this benchmark.

The primary ingredient in this product is recycled glass. While recycled

content may vary from year to year, the recycled content is currently greater than 60% by weight. The second largest content is silica sand which is sourced as locally as possible. The third largest ingredient is cornbased syrup (dextrose or fructose). As a result of using plant-based binders, the VOC profile of this product is very interior friendly. The emission from our factories is also much better for our communities.

We ensure our glass formulations have no serious health concerns by allowing our processes to be audited to meet European Certification Board for Mineral Wool Products (EUCEB) biosolubility requirements.

At this time, the product is landfilled at end of life. We take extended

Where it goes at the end of its life

producer responsibility very seriously and have active programs to address end of life. There is no option other than landfills at this time.

How we're making it healthier Knauf engages very closely with its vendors to eliminate and avoid

chemicals of concern. No competitor has as many Red List free products as Knauf Insulation. We continually reduce our environmental impacts through recycled content and optimize our products by designing them to be transformative.

See how we make it greener

Rating systems LEED BD+C: New Construction | v4 - LEED v4 Building product disclosure and optimization **Material Ingredients** Credit value options 1. Reporting 2. Optimization 3. Supply Chain Optimization Living Building Challenge 3.0 Materials petals imperatives **№** 10. Red List Free 12. Responsible Industry 13. Living Economy Sourcing Well Building Standard® Air and Mind Features Air, 26. Enhanced Material Safety Mind, 97. Material Transparency Mind, 98. Organizational Transparency

Collaborative for High Performance Schools National Criteria MW 10.1 — Building Product Health Related Information Reporting

Product Health Related Information Report

SM Transparency Report™ + Material Health Overview™

evaluation **VERIFICATION** Self-declared

KNA - 12032018 - 006

Material

The material health evaluation is self-declared and done in accordance with the HPD Open Standard 2.1

HPD Collaborative 401 Edgewater Place, Suite 600 Wakefield, MA 01880

self-declared and done in accordance with the Manufacturers **Guide to Declare. International Living Future Institute**

The material health evaluation is

501 East Madison St. Seattle, WA 98122 206 223 2028

INTERNATIONAL

Contact us

317 398 4434

Knauf Insulation, Inc.

Shelbyville, IN 46176

One Knauf Drive

1 product each

1 point

SM Transparency Catalog ► Knauf Insulation Showroom ► Atmosphere[™] Duct Wrap & KN Series

How we make it greener

Atmosphere™ Duct Wrap & KN Series

See LCA results by life cycle stage

RAW MATERIAL ACQUISITION



Collapse all

Utilize recycled content

Our plants use 60 - 80% recycled content – which translates to about 10 railcars of recycled glass cullet a day. By leveraging so much recycled content, we reduce the energy required to form glass fibers by 20%. If we use even 60% recycled content, then mining impacts are reduced proportionately.

Pursue sequestration potential

Manson and Knauf's bio-based ECOSE Technology is derived from corn. On average, the Knauf Family Farm produces one half the amount of corn we use to make our products on an annual basis, which is equal to 5,000 acres. While we don't grow the corn used in our products, the use of corn has a significant carbon sequestration impact on our processes. For instance, the use of corn actually offsets the carbon impact of some of the ancillary facers used on our products.





MANUFACTURING

Develop bio-based formaldehyde-free binder


In 2008, Manson and Knauf Insulation launched perhaps the nation's largest formaldehyde-free green chemistry initiative called ECOSE Technology. Offering this into the building materials marketplace quickly transformed the entire glass mineral fiber industry toward bio-based chemistries. Today phenol-formaldehyde (PF) based resins are largely a thing of the past with regard to large volume mineral fiber based insulation products. Manson and Knauf have also launched a new business venture to assist other industries in accessing ECOSE Technology for their processes.

In a given year, using corn-based ECOSE Technology instead of phenol & formaldehyde avoids the equivalent of more than 100,000 barrels of oil in North America alone.




Lead green chemistry efforts


Following the launch of our ECOSE Technology in 2009, we had transformed all of our products and processes to this new technology. Using our bio-based ECOSE Technology has removed phenol and formaldehyde from our stack emissions. By 2012, the entire industry had followed our lead. This initiative not only established Manson and Knauf Insulation in a leadership position, but it had a transformative impact on our industry in general.

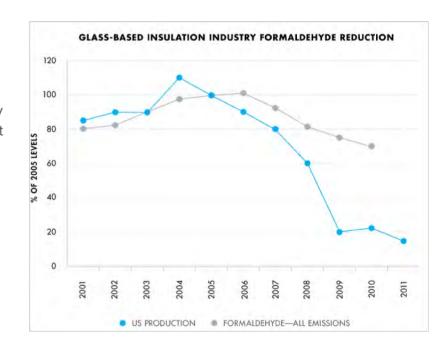

Green manufacturing Processes

- 1. Regenerative thermal oxidizers Manson and Knauf Insulation use regenerative thermal oxidizers (RTO) to capture and recycle much of the energy we used to cure our products. RTO is equipment used for the treatment of exhaust air. Our ovens exhaust into a ceramic heat exchange media to capture and reuse the heat in the exhausted air. Therefore, the amount of energy required to cure our product is reduced substantially.
- **2. Recycling** As you can see below, everything we do starts with recycling. Our plant uses as much as 80% recycled content. While our only option is to landfill our products at end of life, that doesn't stop us from encouraging consumers to recycle other products, particularly glass bottles.

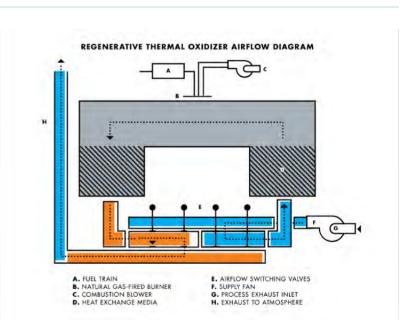

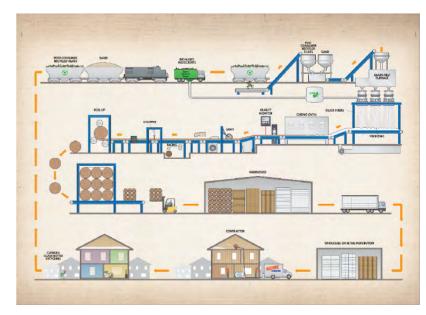

Continuous Improvement


Continuous improvement is key to our sustainable development. Globally, we maintain the following Bureau Veritas certifications: ISO 9000, 14000, and 50001. These certifications relate to quality management systems, energy management and environmental management efforts. For more information on our current continuous improvement efforts, please review our global sustainability report.



Leverage compression packaging

Glass is a high modulus material, which helps to facilitate compression packaging. We compress our insulation to fit up to five times more product on every truck. This compression means:

- More material can fit on one truck when compared to other insulation materials
- Fewer packages on a job
- Fewer deliveries needed

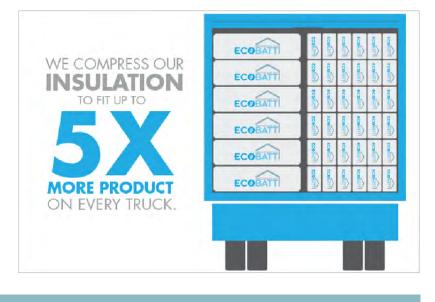

INSTALLATION AND MAINTENANCE



Be confident in glass mineral wool's safety

In the past, a label regarding the carcinogenic potential of insulation made from glass fibers was required on all packaging. Following forty years of research, glass mineral wool has been exonerated entirely. Glass mineral wool is comprised of fibers that are biosoluble, meaning that the fibers dissolve in the body in a short period of time and exit the body with normal bodily functions. The scrutiny glass mineral wool has undergone is now seen as proof of its safety.

Meet and exceed green standards

GREENGUARD certified On the forefront of indoor air quality, Knauf Insulation was the first GREENGUARD certified product in 2002. This achievement led us to understand the impact our formaldehyde-free products could have on the indoor environment. The formaldehyde-free claim is third party validated by UL Environment.

Red List Free Since 2012, Knauf Insulation North America used the Living Building Challenge (LBC) Red List as its developmental benchmark. The Red List is a list of chemicals that are avoided in material imperative for the construction of LBC buildings. Formaldehyde is just one of about 800 chemicals on the Red List. Manson Insulation has chosen the Health Product Declaration® (HPD) Collaborative as its standard for reporting building product content and associated health information.

EUCEB tested Glass fiber is perhaps the most widely studied building material available today. All of our processes and formulations are voluntarily third-party audited for compliance with the health and safety exoneration criteria for glass and rock based fiber through the European Certification Board for Mineral Wool Products (EUCEB) exoneration process. This quarantees the formulations are biosoluble and pose no health concerns. Having 35 years of research behind its safety, perhaps no other building material has been as thoroughly evaluated as fiberglass products. We believe a safe product is one that has been thoroughly evaluated.

Green building rating systems

Our products offer a vast array of potential credits for major green building rating systems, including: WELL, LEED v4, International Green Construction Code, Green Guide for Heath Care, NAHB Green Building Standard and more.

Visit the green building rating systems page to see all the credits you can earn using Manson and Knauf Insulation products.

Green building rating system credits Find out all the credits you can earn with Knauf products. Learn more



DISPOSAL



Promote Recycling

Manson and Knauf are recycling advocates. We take every opportunity to advocate for recycling and financially support the Glass Recycling Coalition (GRC). We feel that a comprehensive understanding of the benefits of recycling will lead to greater recycling adoption and more promotion by state and local governments. While our only option is to landfill our products at end of life, that doesn't stop us from encouraging consumers to recycle other products, particularly glass bottles.





SM Transparency Report™ + Material Health Overview™

VERIFICATION

LCA

3rd party reviewed

NSF.

NSF.

Material evaluation

Transparency Report

Self-declared

3rd party verified



Validity: 12/03/18 - 12/03/23 KNA - 12032018 - 006

This environmental product declaration (EPD) was independently verified by NSF to ISO 21930:2017, EN 15804, the ULE PCR and ISO 14025:2006.

NSF Certification, LLC

P.O Box 130140 789 N.Dixboro Road Ann Arbor, MI 48105, USA 734 769 8010



SUMMARY

Reference PCR

UL Building Envelope Thermal Insulation,

Regions; system boundaries North America; Cradle to grave

Functional unit / reference service life: 1 m² of installed insulation w/packaging;

thickness that gives an avg thermal resistance of RSI = $1 \text{ m}^2 \cdot \text{K/W}$ over 75 years. LCIA methodology: TRACI 2.1

LCA software; LCI database

GaBi 7; GaBi 2017

LCA conducted by: Sustainable Minds **Public LCA:**

Knauf Insulation, Inc.

One Knauf Drive Shelbyville, IN 46176

317 398 4434







Additional EPD content required by: **ULE PCR Parts A and B for Building Envelope Thermal Insulation**

Atmosphere™ Duct Wrap & KN Series

kg CO.

Data

Background This company-specific product/product group specific declaration was created by collecting product data over the course of a year for each line at each location the product was manufactured. For products with multiple manufacturing locations, data are a weighted average by production volume at each location. For average products, which are products that have more than one facing option, data are a weighted average of the mass of each functional unit. The reference service life applies for the reference in-use conditions only.

Allocation Since only facility-level data were available, allocation among a facility's co-products was used to determine the input and output flows associated with each product. Allocation of materials and energy was done on a mass basis for all products except for the facing, which was allocated based on product area. Allocation of transportation was based on either weight or volume, depending on which was found to greater restrict the amount of cargo. Glass cullet is assumed to enter the system burden-free in that burden associated with the production of virgin glass is not allocated to the fiberglass life cycle. Likewise, the system boundary was drawn to include landfilling of fiberglass at end-of-life (following the polluter pays principle), but exclude any credits from recovery.

Cut-off criteria For the inclusion of mass and energy flows are 1% of renewable primary resource (energy), 1% nonrenewable primary resource (energy) usage, 1% of the total mass input of that unit process, and 1% of environmental impacts. The total of neglected input flows per module does not exceed 5% of energy usage, mass, and environmental impacts. The only exception to these criteria is substances with hazardous and toxic properties, which must be listed even when the given process unit is under the cut-off criterion of 1% of the total mass. No known flows are deliberately excluded from this declaration.

Scenarios and additional technical information

PARAMETER	VALUE	UNII
Transport to the building site [A4]		
Vehicle type	Truck	
Average distance from Shelbyville to installation site	680	mi
Average distance from Lanett to installation site	580	mi
Average distance from Shasta Lake to installation site	884	mi
Capacity utilization by mass	27	%
Installation into the building [A5]		
Distance from installation site to disposal	100	mi
Mass of plastic packaging waste to disposal	0.0774	kg
Biogenic carbon contained in plastic packaging	0	kg CO ₂
GWP based in biogenic carbon content of plastic packaging	0	kg CO ₂ e
Disposal/reuse/recycling [C1-C4]		
Distance from installation site to disposal	100	mi
Mass of product waste to disposal	0.619- 0.763	kg
	2 16E-02-	

Removals of biogenic carbon (excluding packaging)

Resource use, output and waste flows, and carbon emissions and removals for unfaced Atmosphere™ Duct Wrap and

KN Utility Insulation					_							٠.				
Parameter	Unit	A1-A3	Α4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	Total
Resource use indicat	ors															
Renewable primary energy used as energy carrier (fuel)	MJ, LHV	2.25E+00	7.94E-02	6.07E-03	0	0	0	0	0	0	0	0	5.78E-03	0	5.05E-02	2.40E+0
Renewable primary resources with energy content used as material	MJ, LHV	5.26E-04	0	9.17E-07	0	0	0	0	0	0	0	0	0	0	0	5.27E-04
Total use of renewable primary resources with energy content	MJ, LHV	2.25E+00	7.94E-02	6.08E-03	0	0	0	0	0	0	0	0	5.78E-03	0	5.05E-02	2.40E+0
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	3.80E+01	3.26E+00	1.17E-01	0	0	0	0	0	0	0	0	2.38E-01	0	7.36E-01	4.95E+0
Non-renewable primary resources with energy content used as material	MJ, LHV	3.115E-08	0	8.03E-11	0	0	0	0	0	0	0	0	0	0	0	3.12E-08
Total use of non-renewable primary resources with energy content	MJ, LHV	4.51E+01	3.26E+00	1.17E-01	0	0	0	0	0	0	0	0	2.38E-01	0	7.36E-01	4.95E+0
Secondary materials	kg	3.33E-01	0	0	0	0	0	0	0	0	0	0	0	0	0	3.33E-01
Renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Recovered energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources	m3	4.76E+02	8.91E+00	3.30E+00	0	0	0	0	0	0	0	0	6.49E-01	0	2.36E+01	5.13E+02
Output flows and wa	ste categ	ory indica	tors													
Hazardous waste disposed	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-hazardous waste disposed	kg	0	0	7.74E-02	0	0	0	0	0	0	0	0	0	0	6.19E-01	6.96E-0
High-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbon emissions an	d remova	ls														
Biogenic Carbon Removal from Product	kg CO ₂	2.79E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	2.79E-02
Biogenic Carbon Emission from Product	kg CO ₂	4.18E-02	0	0	0	0	0	0	0	0	0	0	0	0	2.16E-03	4.39E-02
Biogenic Carbon Removal from Packaging	kg CO ₂	6.20E-03	0	0	0	0	0	0	0	0	0	0	0	0	0	6.20E-0
Biogenic Carbon Emission from Packaging	kg CO ₂	0	0	3.29E-04	0	0	0	0	0	0	0	0	0	0	0	3.29E-04
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Calcination Carbon Emissions	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbonation Carbon Removals	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

TRACI v2.1 disaggregated results for unfaced Atmosphere™ Duct Wrap and KN Utility Insulation per functional unit

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. These six

used in Production **Processes**

impact categories required by the PCR are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development; however, the EPD users shall not use additional measures for comparative purposes. Impact categories which were not required by the PCR are included in part to allow for the calculation of millipoints using the SM2013 Methodology, but it should be noted that there are known limitations related to these impact categories due to their high degree of uncertainty. LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Impact category	Unit	A1-A3	Α4	A5	B1	B2	В3	В4	B5	В6	В7	C1	C2	C3	C4
Acidification	kg SO ₂ eq	7.19E-03	1.24E-03	3.32E-05	0	0	0	0	0	0	0	0	7.31E-05	0	2.15E-04
Eutrophication	kg N eq	6.12E-04	9.87E-05	8.35E-06	0	0	0	0	0	0	0	0	6.12E-06	0	1.09E-05
Global warming	kg SO ₂ eq	7.88E+00	2.31E-01	5.02E-02	0	0	0	0	0	0	0	0	1.68E-02	0	4.59E-02
Ozone depletion	kg CFC-11 eq	8.45E-10	1.59E-12	5.65E-11	0	0	0	0	0	0	0	0	1.16E-13	0	7.17E-13
Smog	kg O ₃ eq	1.00E-01	4.14E-02	7.46E-04	0	0	0	0	0	0	0	0	2.42E-03	0	4.23E-03
Fossil fuel depletion	MJ, LHV	3.85E+00	4.38E-01	1.44E-02	0	0	0	0	0	0	0	0	3.19E-02	0	9.21E-02

Additional environmental information for unfaced Atmosphere™ Duct Wrap and KN Utility Insulation per functional unit

Impact category	Unit	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	C3	C4
Ecotoxicity	CTUe	1.38E-01	2.88E-02	9.06E-04	0	0	0	0	0	0	0	0	2.10E-03	0	4.04E-03
Carcinogenics	CTUh	5.61E-10	1.22E-10	1.89E-11	0	0	0	0	0	0	0	0	8.90E-12	0	2.00E-10
Non-carcinogenics	CTUh	3.61E-08	9.08E-09	2.57E-09	0	0	0	0	0	0	0	0	6.62E-10	0	2.28E-08
Respiratory effects	kg PM2.5 eq	2.93E-03	6.44E-05	2.91E-05	0	0	0	0	0	0	0	0	3.86E-06	0	1.54E-04

The product does not contain substances that are identified as hazardous according to standards or regulations of the Resource Conservation and Recovery Act (RCRA), Subtitle C, nor does it (or its associated processes) release dangerous, regulated substances that affect health and environment, including indoor air emissions, gamma or ionizing radiation emissions, or chemicals released to the air or leached to water and soil.

Resource use, output and waste flows, and carbon emissions and removals for FSK-faced Atmosphere™ Duct Wrap per functional unit

Resource use indicate	ors															
Renewable primary energy used as energy carrier (fuel)	MJ, LHV	4.38E+00	9.58E-02	6.07E-03	0	0	0	0	0	0	0	0	6.98E-03	0	6.09E-02	4.55E+00
Renewable primary resources with energy content used as material	MJ, LHV	5.49E-04	0	9.17E-07	0	0	0	0	0	0	0	0	0	0	0	5.50E-04
Total use of renewable primary resources with energy content	MJ, LHV	4.38E+00	9.58E-02	6.08E-03	0	0	0	0	0	0	0	0	6.98E-03	0	6.09E-02	4.55E+00
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	5.37E+01	3.94E+00	1.17E-01	0	0	0	0	0	0	0	0	2.87E-01	0	8.89E-01	5.89E+01
Non-renewable primary resources with energy content used as material	MJ, LHV	3.15E-08	0	8.03E-11	0	0	0	0	0	0	0	0	0	0	0	3.16E-08
Total use of non-renewable primary resources with energy content	MJ, LHV	5.37E+01	3.94E+00	1.17E-01	0	0	0	0	0	0	0	0	2.87E-01	0	8.89E-01	5. 89E+01
Secondary materials	kg	3.33E-01	0	0	0	0	0	0	0	0	0	0	0	0	0	3.33E-01
Renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-renewable secondary fuels	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Recovered energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Use of net fresh water resources	m3	2.32E+03	1.08E+01	3.30E+00	0	0	0	0	0	0	0	0	7.84E-01	0	2.85E+01	2.36E+03

Output flows and waste category indicators

Parameter

Unit

A1-A3

Hazardous waste disposed	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Non-hazardous waste disposed	kg	0	0	7.74E-02	0	0	0	0	0	0	0	0	0	0	6.83E-01	7.60E-01
High-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Carbon emissions and removals

Biogenic Carbon Removal from Product	kg CO ₂	3.84E-02	0	0	0	0	0	0	0	0	0	0	0	0	0	3.84E-02
Biogenic Carbon Emission from Product	kg CO ₂	4.18E-02	0	0	0	0	0	0	0	0	0	0	0	0	2.61E-03	4.44E-02
Biogenic Carbon Removal from Packaging	kg CO ₂	6.20E-03	0	0	0	0	0	0	0	0	0	0	0	0	0	6.20E-03
Biogenic Carbon Emission from Packaging	kg CO ₂	0	0	3.29E-04	0	0	0	0	0	0	0	0	0	0	0	3.29E-04
Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Calcination Carbon Emissions	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbonation Carbon Removals	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Carbon Emissions from Combustion of Waste from Non-Renewable Sources used in Production Processes	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

TRACI v2.1 disaggregated results for FSK-faced Atmosphere™ Duct Wrap per functional unit

LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. These six impact categories required by the PCR are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development; however, the EPD users shall not use additional measures for comparative purposes. Impact categories which were not required by the PCR are included in part to allow for the calculation of millipoints using the SM2013 Methodology, but it should be noted that there are known limitations related to these impact categories due to their high degree of uncertainty. LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Impact category	Unit	A1-A3	Α4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4
Acidification	kg SO ₂ eq	8.63E-03	1.49E-03	3.32E-05	0	0	0	0	0	0	0	0	8.83E-05	0	2.59E-04
Eutrophication	kg N eq	7.35E-04	1.19E-04	8.35E-06	0	0	0	0	0	0	0	0	7.39E-06	0	1.31E-05
Global warming	kg SO ₂ eq	8.26E+00	2.79E-01	5.02E-02	0	0	0	0	0	0	0	0	2.03E-02	0	5.55E-02
Ozone depletion	kg CFC-11 eq	3.98E-09	1.92E-12	5.65E-11	0	0	0	0	0	0	0	0	1.40E-13	0	8.65E-13
Smog	kg O ₃ eq	1.21E-01	4.99E-02	7.46E-04	0	0	0	0	0	0	0	0	2.92E-03	0	5.11E-03
Fossil fuel depletion	MJ, LHV	4.89E+00	5.28E-01	1.44E-02	0	0	0	0	0	0	0	0	3.85E-02	0	1.11E-O1

Additional environmental information for FSK-faced Atmosphere™ Duct Wrap per functional unit

Impact category	Unit	A1-A3	Α4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4
Ecotoxicity	CTUe	1.65E-01	3.47E-02	9.06E-04	0	0	0	0	0	0	0	0	2.53E-03	0	4.88E-03
Carcinogenics	CTUh	9.77E-10	1.47E-10	1.89E-11	0	0	0	0	0	0	0	0	1.07E-11	0	2.42E-10
Non-carcinogenics	CTUh	7.59E-08	1.10E-08	2.57E-09	0	0	0	0	0	0	0	0	7.99E-10	0	2.75E-08
Respiratory effects	kg PM2.5 eq	3.16E-03	7.77E-05	2.91E-05	0	0	0	0	0	0	0	0	4.66E-06	0	1.86E-04

The product does not contain substances that are identified as hazardous according to standards or regulations of the Resource Conservation and Recovery Act (RCRA), Subtitle C, nor does it (or its associated processes) release dangerous, regulated substances that affect health and environment, including indoor air emissions, gamma or ionizing radiation emissions, or chemicals released to the air or leached to water and soil.



Validity: 12/03/18 - 12/03/23 KNA - 12032018 - 002 NSF.

Knauf Insulation, Inc. One Knauf Drive Shelbyville, IN 46176

317 398 4434